

LED-Reading Lamp with flexible arm

short version


L400069S



- + extended life time - maximum energy efficiency - minimal maintenance
- + functional illumination to a person's well-being considering the biological and emotional lighting effect
- + uniform light distribution and an adequate luminance intensity assist the visual performance and facilitate the visual task

Product description

Colour of lamp:	silver
Light source:	LED 12 V / 3 W, 60°
Light colour:	4.000 K
Light output:	1.480 Lux / 500 mm
Luminous flux:	230 lm
Life expectancy:	25.000 h (light source)
Electrical mains:	100 - 240 V, 50 - 60 Hz
Switch:	at lamp head
Colour rendering index:	Ra 80
Working radius:	appr. 600 mm
Total weight (net):	appr. 1,2 kg
Joint pin:	Ø 18, L 35 mm
Total length:	appr. 830 mm
Orientating light:	integrated in switch
Transformer:	plug transformer
Operation mode:	continuous use
optional:	with international plug, with wide range power supply (without orientation light) / with cord switch

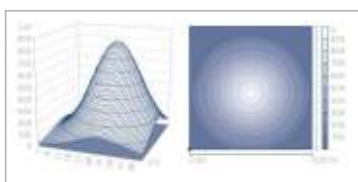

✓ Economy

- + complete recyclability